





BL 105

BL 75


BL 55

BL 45


BL 25

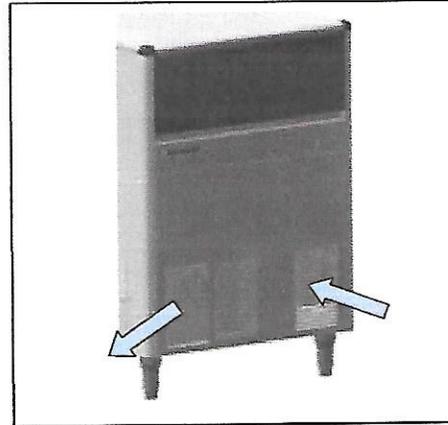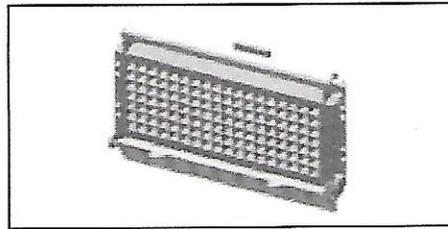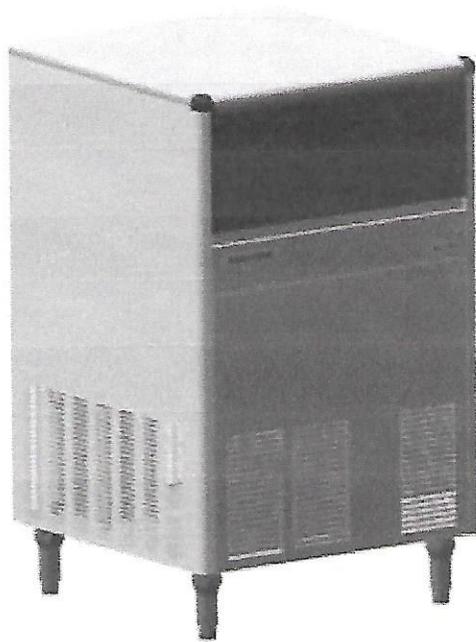


Ice cube size
2.22X2.22X2.22(cm)

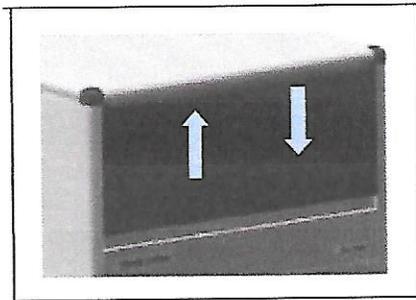

Slide Up Bin Door

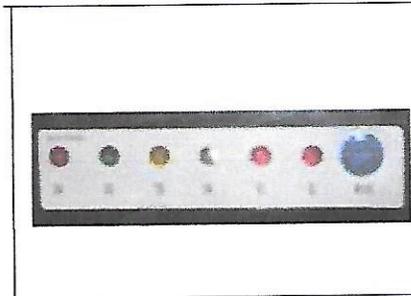

PC Board with Indicators


	 Air Cool	 24h Production	 Bin Cap		 [V/Hz/ph]	 [HxWxD mm] [HxWxD inches]		 130 mm (5 1/8")		 R134a	
			[kg]	[lbs]		[kg]	[lbs]	[H mm]	[H inches]		
BL 105	✦	100*	222	38	84	230/50/1	999x675x670	39-21/64"x26-37/64"x26-3/8"	1129	44-29/37"	R134a
BL 75	✦	75*	167	38	84	230/50/1	999x675x670	39-21/64"x26-37/64"x26-3/8"	1129	44-29/37"	R134a
BL 55	✦	50*	111	20	44	230/50/1	735x675x580	28-60/64"x26-37/64"x22-54/64"	865	34-1/16"	R134a
BL 45	✦	40*	89	20	44	230/50/1	735x675x580	28-60/64"x26-37/64"x22-54/64"	865	34-1/16"	R134a
BL 25	✦	25*	56	14	31	230/50/1	735x478x580	28-60/64"x18-53/64"x22-54/64"	865	34-1/16"	R134a

2

Years Warranty
Ans de Garantie
Jahre Garantie
Años de Garantía
Anni di Garanzia

Subject to certain limitations and exclusions
Assujettie aux limites et exclusions prescrites
Abhängig von Bestimmten Einschränkungen und Ausnahmen
Sujeta a algunas limitaciones y exclusiones
Soggetta ad alcune limitazioni ed esclusioni

Scotsman®

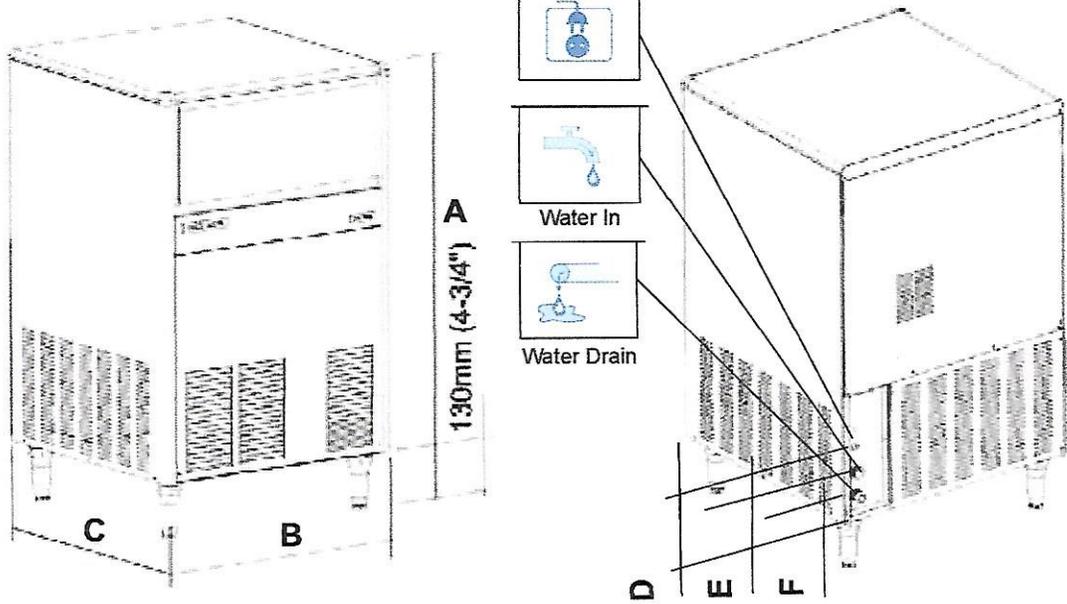

	-A	-B	-C	-D	-E	-F
BL 105	999	675	670	190		55
BL 75	999					
BL 55	735					
BL 45	735	478	580			
BL 25	735					

	[BTU/h]	[W]	[Ømm ²]	[W]	[A]	[KW/h]	[l/h]	[gal/h]	[kg]	[lbs]	[kg]	[lbs]
BL 105	7800	2287	3 X 1.5	850	16	16.5	10	2.6	81	180	93	207
BL 75	5350	1350	3 X 1.5	670	16	12.0	7	1.8	75	168	87	194
BL 55	4235	1245	3 X 1.5	500	16	11.0	6.5	1.7	52	116	62	138
BL 45	4235	1245	3 X 1.5	500	16	10.0	6	1.6	50	111	60	133
BL 25	2287	672	3 X 1.5	340	16	6.5	4.6	1.2	43	95.6	52	115

BL105

T	90°	70°	60°	50°	
°C	32°	21°	15°	10°	
90°	199	258	217	208	lbs
10°	88	84	88	102	kg
70°	158	202	203	217	lbs
21°	84	89	84	98	kg
60°	162	187	204	243	lbs
32°	92	80	82	96	kg
100°	153	186	173	184	lbs
38°	88	78	78	88	kg

BL75

T	90°	70°	60°	50°	
°C	32°	21°	15°	10°	
90°	146	156	163	178	lbs
10°	65	70.5	73.5	78.5	kg
70°	140	151	158	163	lbs
21	65	68.25	70.5	73.5	kg
60°	138	148	153	160	lbs
32°	61.5	66.75	69	72	kg
100°	116	126	130	138	lbs
38°	51.75	56.25	58.5	62.25	kg

Minimum

10°C (50°F)

5°C (41°F)

-10%

1 BAR
14 psi

Maximum

40°C (103°F)

35°C (95°F)

+10%

5 BAR
70 psi

BL55

T	90°	70°	60°	50°	
°C	32°	21°	15°	10°	
90°	88	100	105	111	lbs
10°	40	45	46.25	50	kg
70°	77	86	84	90	lbs
21°	35	39.75	42.5	45	kg
60°	63	71	70	74	lbs
32°	29.75	34.38	37.5	40	kg
100°	47	53	52	55	lbs
38°	21.25	24.75	26.25	28.25	kg

BL45

T	90°	70°	60°	50°	
°C	32°	21°	15°	10°	
90°	74	83	82	88	lbs
10°	32	36	37	40	kg
70°	62	70	70	76	lbs
21°	30	33.8	34	36	kg
60°	51	61	60	64	lbs
32°	23	27.5	28	30	kg
100°	37	41	41	43	lbs
38°	17	20	20	21	kg

BL25

T	90°	70°	60°	50°	
°C	32°	21°	15°	10°	
90°	44	52	56	60	lbs
10°	20	23.5	24.8	26.5	kg
70°	40	48	53	56	lbs
21	18	22	24	26	kg
60°	32	37	40	43	lbs
32°	14.5	17	18.5	19.5	kg
100°	30	34	37	40	lbs
38°	13.5	16.8	18.8	19	kg